


50Hz

# Flygt 2610

MEET THE NEW MEMBER OF YOUR DEWATERING TASK FORCE

**When water is your challenge, Flygt 2600 is your answer.**

With a comprehensive range of pumps to suit any task, the Flygt 2600 series is the solution used to get the job done in mining, construction, industrial or municipal applications all over the world. The Flygt 2600 series have reliability built-in with innovative ways of reducing wear on the impeller and seal.

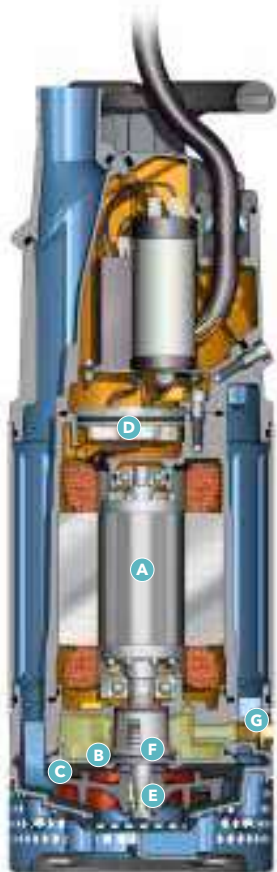

- A** Class F motor
- B** Spin-Out™  
Protects the outer seal from abrasive particles.
- C** Hard-Iron™ impeller and suction cover.
- D** Sealed off terminal board
- E** Single impeller adjustment screw
- F** Aluminium Plug-in™ seal
- G** External inspection and oil plugs


**Inspection cover**

**Air valve**  
The cooler the motor, the better the performance.



**FLYGT**  
a xylem brand

## Performance

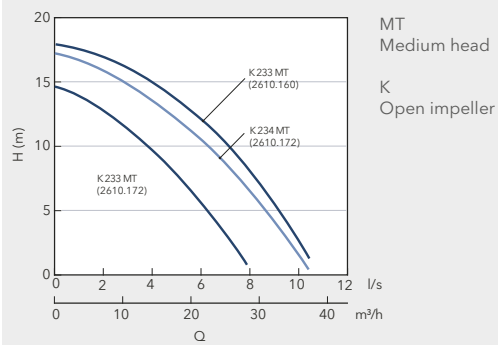

## Rating specific motor data, 2610.172

0.85 kW / 1-phase / 2,755 rpm / Motor 13-06-2BB

Voltage V	Rated current A	Starting current A
110 serial	11	38
220 serial	5.3	19
230 serial	5.1	20
240 serial	5.1	21

## Rating specific motor data, 2610.172

1.2 kW / 3-phase / 2,740 rpm / Motor 13-06-2BB

Voltage V	Rated current A	Starting current A
220 D	11	38
230 D	5.3	19
240 D	5.1	20
380 Y	5.1	21
400 Y	2.6	12
415 Y	2.5	11
440 Y	2.5	12
500 Y	2.1	8.7
525 Y	2.0	9.2
550 Y	2.0	9.7

## Rating specific motor data, 2610.160

1.4 kW / 1-phase / 2,855 rpm / Motor 13-10-2BB

Voltage V	Rated current A	Starting current A
220	8.0	31
230	7.8	32
240	7.8	34

## Denomination

Product code	2610.172/2610.160
Installation	Portable
Discharge connection	2"
Impeller characteristics	Medium head (MT), Open impeller (K)

## Process data

Liquid temperature	40°C (standard)
Depth of immersion	max 20 m
Liquid density	max 1100 kg/m <sup>3</sup>
Strainer hole dimension	ø 7.5 mm
The pH of the pumped liquid	pH 5-8

## Motor data

Frequency	50 Hz
Insulation class	F, 155°C
Voltage variation	max ± 5% - continuously running max ± 10% - intermittent running
Voltage imbalance	max 2% - between phases max 30 - No. of starts/hour

## Monitoring equipment

Thermal contacts	125°C opening temperature
------------------	---------------------------

## Cables

SUBCAB®	SUBCAB® Submersible cable
---------	---------------------------

## Materials

Outer casing	Aluminium
Impeller	Hard-Iron®
Wear parts	Nitrile rubber/Hard-Iron®
Stator housing	Aluminum
Strainer	Stainless steel
Shaft	Stainless steel
O-rings	Nitrile rubber
Discharge connection	Aluminium

## Mechanical face seals

Inner Active Seal™	Silicone carbide/Silicone carbide
Outer	Silicone carbide/Silicone carbide

## Weight and dimensions

Weight (excl. cable)	172 version 21.5 Kg / 160 version 25 kg
Height	172 version 571 mm / 160 version 601 mm
Width	ø 200 mm both versions

## Options

Warm liquid version	Warm liquid version max 70°C
---------------------	------------------------------

Quick couplings

Starters

Level regulators

## Accessories

Tandem connections, hose connections and floating rafts. Electrical accessories such as pump controllers, control panels and monitoring relays. Low suction collars for residual pumping. Zinc anodes.

**xylem**  
Let's Solve Water

XYLEM  
Gesällvägen 33  
174 87 Sundbyberg, Sweden  
Tel +46 8 475 60 00  
www.xylem.com  
www.flygt.com

© 2013 Xylem, Inc. All rights reserved. Flygt is a trademark of Xylem Inc. or one of its subsidiaries.

Environmental Product  
Declaration  
EPD-declared product  
**EPD®**